

Manufacturer:	Hatteland Technology AS
Product:	8.0 inch Maritime Multi Computer (MMC)
Type:	HD 08T30 MMC-2xx-xxxxHx (w/HD IO-Board)

Last Revised:	08 Sep 2025
Revision#:	35


8.0 inch Maritime Multi Computer - Series X

Features:


Series X Small Panel Computers offer the ultimate in performance, convenience, state of the art design and enduring quality for system integrators and boat builders. The products offer a range of feature sets optimized for varying requirements and applications. Suitable for applications such as engine control systems, automation systems and more.

Innovative Human Machine Interface (HMI) solutions open up new possibilities for the system integrator. A well implemented touch interface can be much simpler to use than a conventional mechanical button-based interface because it can show the user only those controls that are relevant to a particular operation, while all the controls in a conventional interface are always present.

The GLASS DISPLAY CONTROL, or GDC, allows control of brightness and menu options through projected switches under the glass. Integrators can build software to work with our API to control menu, brightness and other features. This model is delivered with a factory mounted Projected Capacitive Touch Screen (Multitouch, USB interface), Optical Bonding Technology, Solid State Fanless Construction - No Moving Parts, Embedded light sensor, Buzzer and Aluminum Chassis with Glass Front as standard. Brightness is dimmable from 0-100%. Model is RetroFit HD 07T22 compatible.

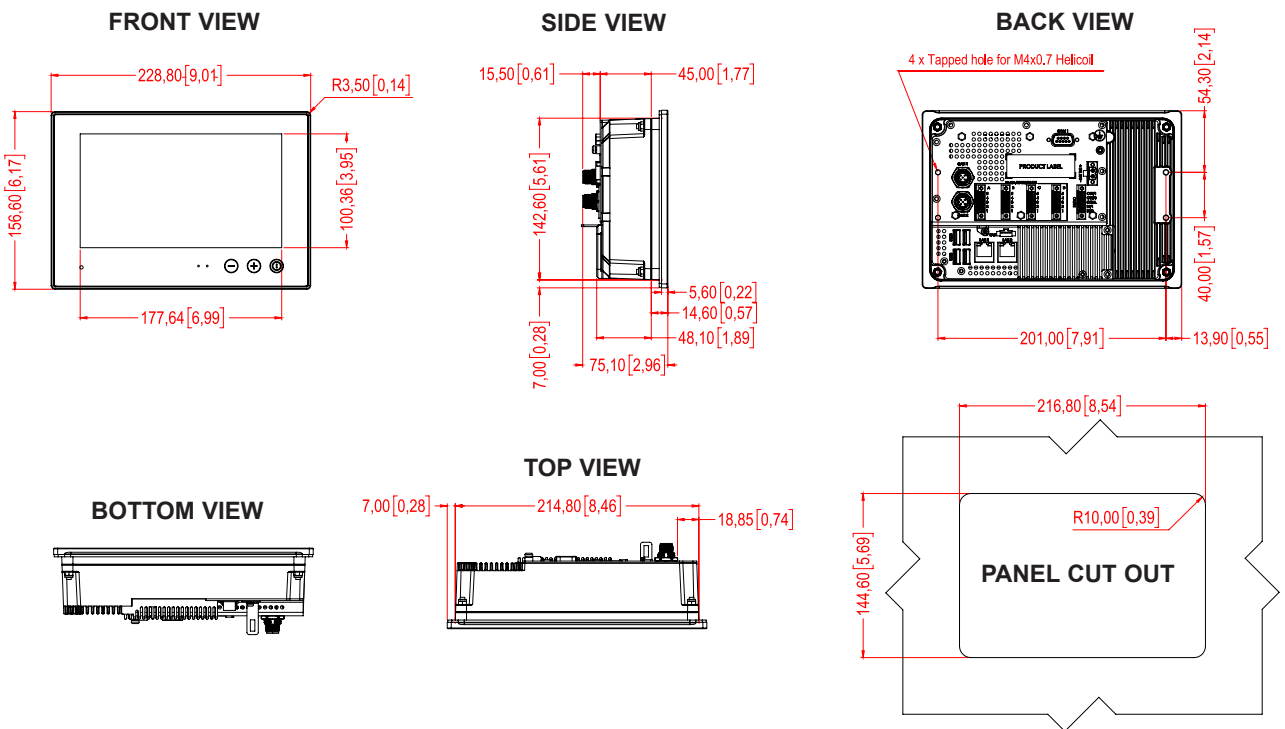

With HD FAN SX2-A1 (External Fan) Accessory

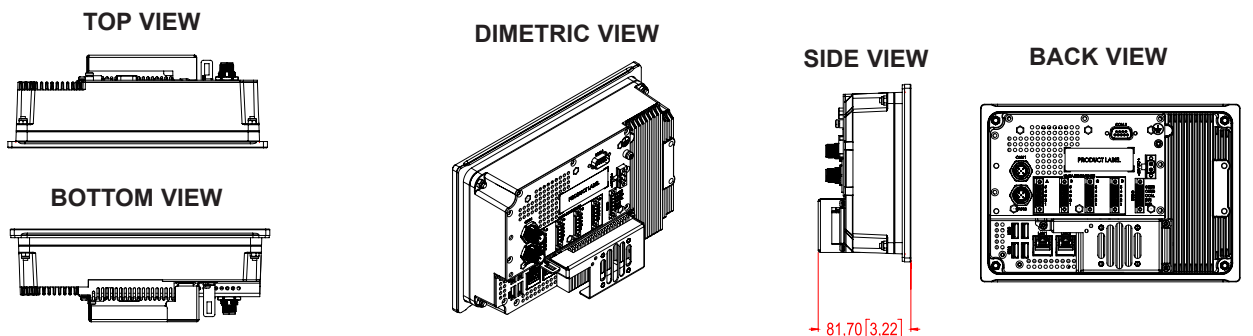

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

TFT Technology:

- 8.0 inch TFT Liquid Crystal Display module, IPS (in-plane-switching)
- a-si TFT Active Matrix
- Widescreen, Aspect Ratio 16:9
- LED Backlight Technology

TFT Characteristics:

- Native Resolution : 1280 x 720 (HD)
- Pixel Pitch (RGB) : 0.138 (H) x 0.138 (V) mm
- Response Time : 20ms (typ) (Tr+Tf)
- Contrast Ratio : 1000:1 (typ)
- Light Intensity : 680 cd/m² (typ)
- Viewable Angle : 85 deg. (up/down/left/right) (typical)
- Active Display Area : 176.64 (H) x 99.36 (V) mm
- Max Colors : 16.7 million (24bit)

Computer Specifications:

- Supported OS : See table below
- CPU/Processor : 1 x Intel Atom® x5-E3930 Processor, 2M Cache, 1.30GHz / 1.80GHz
or 1 x Intel Atom®x5-E3940 Processor, 2M Cache, 1.60GHz / 1.80GHz
- Installed Storage : 1 x 32GB eMMC (Default)
or see table below for additional options
- Installed Memory : 1 x 2GB DDR3L single channel (default)
or see table below for additional options
- System Chipset : Intel® SOC
- Graphics Chipset : Intel® HD Graphics 500 (CPU dependent)
- Ethernet LAN #1 : Intel® i210IT PCI-E Gigabit LAN 10/100/1000Mbps
- Ethernet LAN #2 : Realtek RTL8111G PCI-e Gigabit LAN 10/100/1000Mbps
- BIOS : AMI BIOS, supports ACPI
Note: "Legacy Mode" option is not fully supported for System Chipset and Microsoft® Windows® 10.
- Speaker : None
- WatchDog Timer : Yes (256 segments, 0, 1, 2...255 sec/min)
- Other features : RTC (0.5s/day*), Battery Alarm, TPM2.0, Firmware Raid, GPIO, WakeOnLan, Fast Boot, AT mode, USB Boot

Native 1:1 resolution recommended is 1280 x 720 @ 60 Hz.

*Required accuracy may be dependent of the actual implementation/environment and may require calibration to be within specified boundaries.

Power Specifications:

Power Supply:

- 12-24VDC Nominal

Power Consumption:

- Operating : 21W (typ) - 50W (max)

Available Computer Configurations:

Type	Description	Size/Specification
CPU	1 x Intel Atom® x5-E3930 Processor, (32GB eMMC Default)	2M Cache, 1.30GHz / 1.80GHz
	1 x Intel Atom® x5-E3940 Processor, (128GB eMMC Default)	2M Cache, 1.60GHz / 1.80GHz
Memory	DDR3L SO-DIMM	- 2GB Single Channel - 4GB Dual Channel - 8GB Dual Channel
Additional Internal Storage:		
Storage	SSD m.2 SATA	- 240GB ->
	eMMC	- 32GB, 128GB
Software Support	Application Programming Interface (API). Documentation: INB100018-7. Note: "SCOM NMEA COM" and "SCOM DIO" are both controlled by Intel® SOC Chipset Drivers (Intel® Serial IO GPIO Driver v2). No additional drivers (typically FTDI) are required.	- SCOM
OS Options	Windows® 10 IoT Enterprise 2019 LTSC (64bit) - Product Distribution End Date January 2029 or Linux (Apollo Lake: use kernel 4.10 or later).	

Physical Dimensions:

- W:228.00 [9.01"] x H:156.60 [6.17"] x D:75.10 [2.96"] mm [inch]
- Weight approx: 1.8kg / 4.0lbs
- **Product Carton Size and Weight:**
- L:320.00 [12.60"] x W:180.00 [7.09"] x H:320.00 [12.60"] mm [inch]
- Approx. 3.2kg / 7.0lbs PENDING

User Controls:

Behind front bezel - Glass Display Control™ (GDC) IP66:

- 3 x Configurable buttons, Status RGB LED,
- Buzzer (through glass) (75-85dB) (according to EN60945), Light Sensor (behind glass)

Environmental Considerations:

• Operating	: Temperature -15°C to +55°C
	: Temperature -20°C to +70°C (HD FAN SX2-A1)
• Storage	: Temperature -20°C to +60°C
• Humidity	: Up to 95% (Operating / Storage)
• Shock - Vibration	: 5g/11ms - 0.7g (IEC 60945 / IACS E10)
• Air Pressure Maximum Altitude	: Operating: 4000m - Storage: 12912m
• Air Pressure Maximum Altitude (Bonded)	: Operating: 3000m - Storage: 3000m
• IP-Rating Protection	: Protection: IP66 front, IP20 rear (EN60529)
• Compass Safe Distance	: Standard: 65cm - Steering: 25cm
• Vibration	: On engine 4grms

Lifetime Considerations:

Even though the test conditions for bridge units provide for a maximum operating temperature of 55°C, continuous operation of all electronic components should, if possible, take place at ambient temperatures of only 25°C. This is a necessary prerequisite for long life and low service costs.

Input/Output Interfaces:

• USB2.0 (<5m)	: 2 x USB Type A (4-pin)
• USB3.0 (<3m)	: 2 x USB Type A (9-pin)
• Ethernet GbLan	: 2 x RJ45
• DC Power Input	: 1 x 2-pin Terminal Block 5.08
• External Fan	: 1 x 4-pin, 292254-4 connector (for optional fan)
• CAN	: 2 x 5-pin M12, NMEA2000, J1939, CANOpen Isolated
• SCOM NMEA COM	: 4 x RS422/RS485, NMEA183, Isolated
• SCOM DIO	: 1 x 5-pin T. Block 3.81, Isolated, Digital 2 x In + 2 x Out
• COM	: 1 x RS-232/RS-485/RS-422, DB9M, non-isolated
• COM RS-232 (Internal)	: 1 x Internal Virtual COM (Software controlled)

Factory Defaults:

- Projected Capacitive Touch Screen (Multitouch, USB interface)
- Optical Bonding Technology
- AG Coated Front Glass
- USBC-24: Dust Covers for USB
- PJC-45: Dust Covers for RJ45 ports
- HD KIT USB-A1: USB Cable Support Bracket
- HD CMB SX2-B1: Console Mount Kit. EN60945 Tested
- P014338: IP66 Mount Gasket (EPDM), Flush/Console mount

Factory Options:

- IP22 (EN60529) Model : HD 08T30 MMC 2xx-xxxPHx
- Without HD IO-Board : HD 08T30 MMC 2xx-xxxxAx
- Variations of CPU/Processor, Storage, RAM/Memory and Operating System
- ATEX C1D2 and UL certification.

Available Accessories:

- HD CMB SX2-B1 : 1 x Console Mount Kit. EN60945 Tested
- HD VED SX2-L2 : 1 x VESA Adapter (75/75, 100/100). Not EN60945 Tested
- HD TMB SX2-A4 : 1 x Table/Ceiling Mount Bracket. Not EN60945 Tested
- HD FAN SX2-A1 : 1 x 40x40cm. -20°C to +70°C
Max speed 7000 rpm +/- 15%
- HD 08COV STD-A1 : 1 x UV Sun Cover
- HD 08TAP SX1-A1 : 1 x Frame Adapter for HD 08T21 Cutout (Retrofit)
- JH C01MF A-A : 1 x USB Cable 1m, TypeA-Chassis mount receptacle
- P014338 : 1 x IP66 Mount Gasket (EPDM), Flush/Console mount
- HT 00262 OPT-A1 : 4 x RS-422/RS-485 isolated, USB ext. module
- HT 00263 OPT-A1 : 4 x RS-232 COM non-isolated, USB ext. module
- HT 00273 OPT-A1 : 4 x Digital IN/OUT isolated, USB ext. module
- HT 00274 OPT-A1 : 2 x LAN 10/100Mbps, RJ45, USB ext. module

Please see user manual/datasheet/drawings for more information

APPROVALS & CERTIFICATES

This product have been tested / type approved by the following classification societies:

IEC 60945 4th (EN 60945:2002)
CCS - China Classification Society

IACS E10
KR - Korean Register

EU RO MR - Mutual Recognition
BV - Bureau Veritas

ClassNK - Nippon Kaiji Kyokai