

Product: **Silicone Rubber Keyboard**

Typenumber: **HT RKCT92x2034-W-MC1**  
Where x is either: S = Desktop mount, F = Panel mount

Last Revised: **12 May 2023**  
Revision#: **04**

## HT RKCT92 Silicone Rubber Keyboard

### Description:

The Hatteland Technology Full travel rubber Keyboard. This 92 key backlit keyboard features a compact keyboard with integrated water-proof 25 mm trackball and scroll function. The rubber keys are proven for efficient cleaning, reduced disinfection time and protection against cross contamination. The backlit keys warrant for optimized performance while working in low-light environments.


### Features:

Compact layout:	92 full travel rubber keys (US layout)
Backlight:	Dimmable backlight at 8 levels by two dedicated keys
LED:	Low power LED's warrant for a long life
Test and certificate:	Certificate of Conformity fully compliant with IEC60945
Power requirements:	Powered directly from USB port


### Illustrations for desktop mount

**HT RKCT92S2034-W-MC1**




TOP VIEW

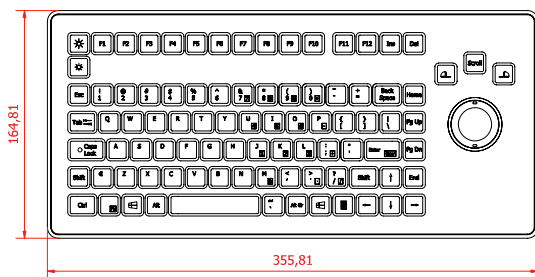

SIDE VIEW




BOTTOM VIEW

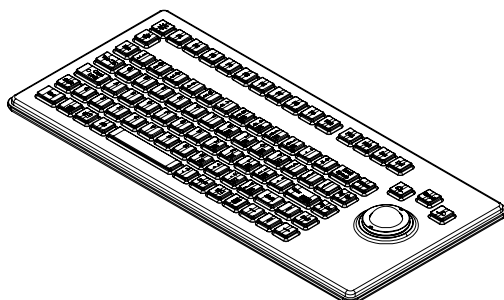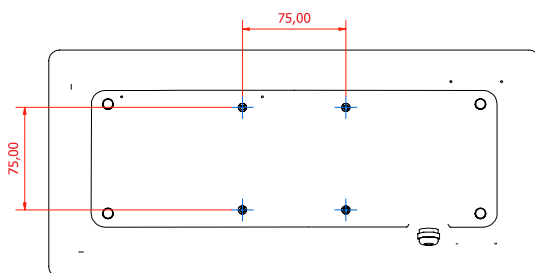


### Illustrations for panel mount

**HT RKCT92F2034-W-MC1**


TOP VIEW

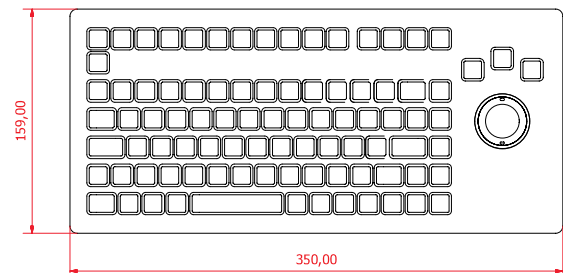



SIDE VIEW



BOTTOM VIEW

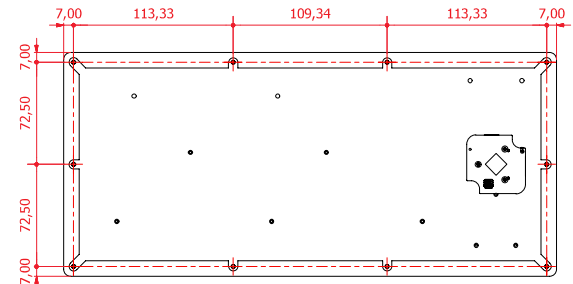

PANEL CUTOUT

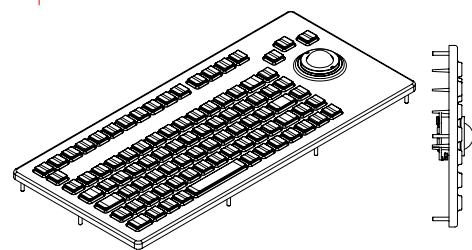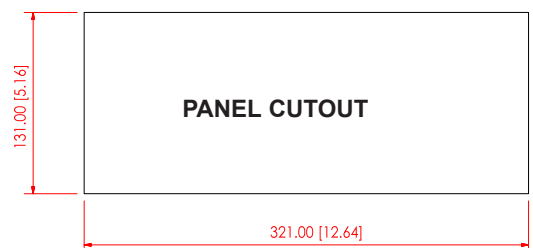

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

## TECHNICAL DESCRIPTION

### Technical Specifications:

Sealing:	IP67 sealed
Keys:	92 full travel rubber keys
Pointing Device:	25 mm optical trackball
Power requirements:	Directly from USB port
Output:	1x 1.8m. USB cable (panel mount) 1x 1.6m. USB cable (enclosed)
Operating temperature:	0°C to +60°C
Compass Safe Distance:	Standard: 5cm - Steering: 5cm
Switch force:	210 grams
Switch stroke:	2mm

### Physical Specifications:

Desktop mount dimensions:	354.5mm x 163.5mm x 38.6mm
Desktop mount Weight:	0.8kg/1.76lbs
Desktop VESA mount:	VESA75
Panel mount dimensions:	350mm x 159mm x 36mm
Panel mount weight:	0.6kg/1.32lbs


### Illustrations for desktop mount

HT RKCT92S2034-W-MC1



### Illustrations for panel mount

HT RKCT92F2034-W-MC1

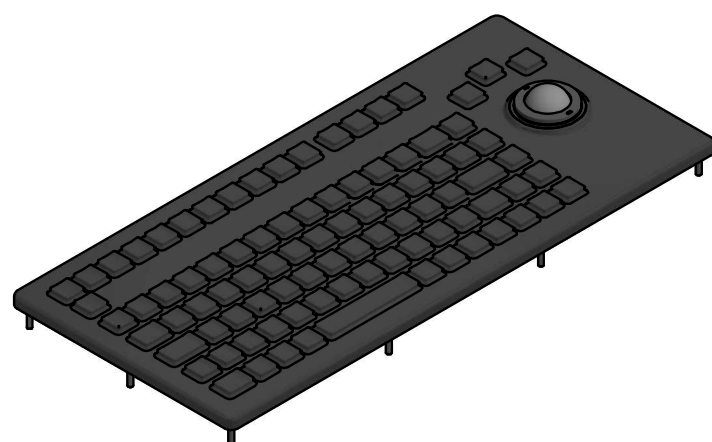

## APPROVALS & CERTIFICATES

These products have been tested / type approved by the following classification societies:

IEC 60945 4th (EN 60945:2002)

IACS E10

IEC 60092-504 3rd

DNV 2.4